


Top Mount Generators

6.2 to 30 kW Top Exhaust

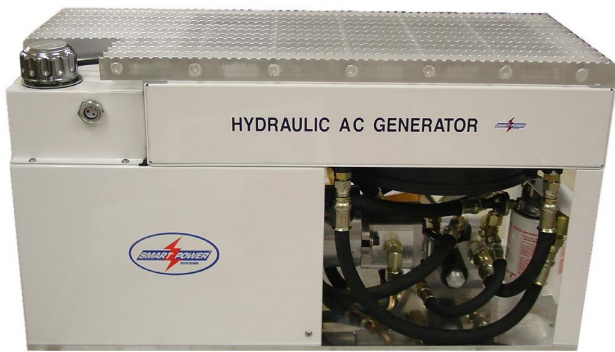

Smart Power Systems® severe-duty, electronic controlled generator systems are designed to meet the most demanding mobile applications, and provide 120VAC/240VAC, 60Hz clean power. The cleanest power available in hydraulic generators.

Their (1) reliability, (2) compact 1 piece module, and (3) proven field performance make Smart Power the *first choice* for fire fighters.

Smart Power Systems® provides ..

Instant power you can rely on

- Trouble free GENSET operation and maintenance
- Rugged tray assembly provides superior component protection
- Smart Start* power engagement reduces stress on genset, PTO and truck powertrain

Compact size

- GENSET module includes integrated hydraulic fluid reservoir
- Drop-in field replacement.
- Smallest industry footprint saves valuable space for other gear/equipment
- Common hookups for 6.2, 8, 10, 15, 20, 25 and 30 kW
- Specifically designed for top mount and compartment mount applications
- Flexible design allows cooler and reservoir to be easily remote mounted

High performance

- Unique “super cooled” power generation for continuous 120°F operation
- Solid state system controller provides total control
- Command and Control Center continuously monitors system and optimizes overall performance
- Meets/exceeds NFPA 1901 requirements

Ease of operation

- Smart Touch® sealed touch pads provide operator interactive capabilities; manual override/control
- Integrated diagnostics and service advisories
- Service intervals of 250 hours or 3 years

Superior warranty protection

- 6 years/1000 hours—includes PTO pump and Command and Control Center
- The total generator system is factory tested and Certified prior to shipment



Outstanding technical support

- Large experienced technical support staff
- Over 45 years of manufacturing expertise
- 165,000 square ft. state-of-the-art facility is ISO9001/2008 certified




Smart Power Systems®

5000 North US-131, Reed City, MI 49677-7922
(231) 832-5525 · Fax (231) 832-3876 · sales@smartpower.com
Smart Power Systems® and Smart Touch® are Nartron registered trademarks
TECHNICAL HOTLINE: (231) 680-4274

*patents 5,087,825; 5,796,183; 7,053,498; 7,459,800; 7,759,811; 8,269,359; 8,269,360; 8,626,384; DE19703404 and others pending

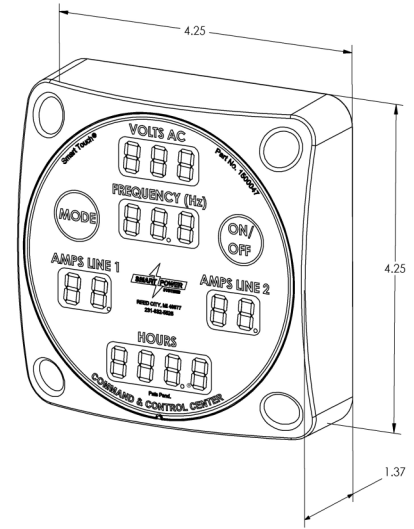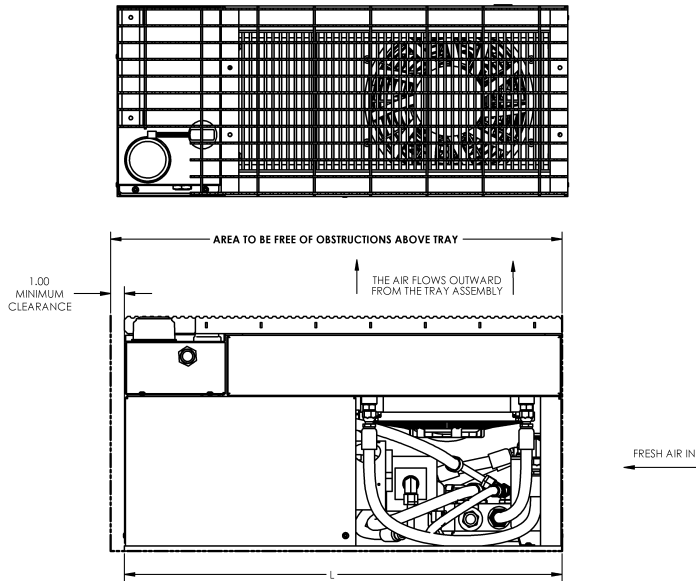

COMMAND & CONTROL CENTER
P/N: 1500047

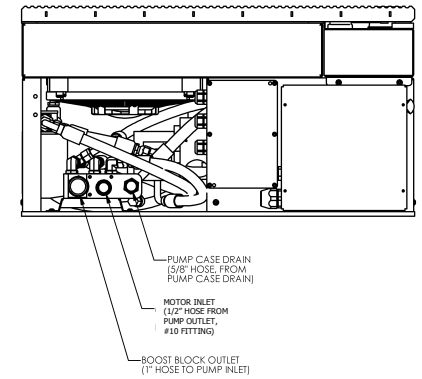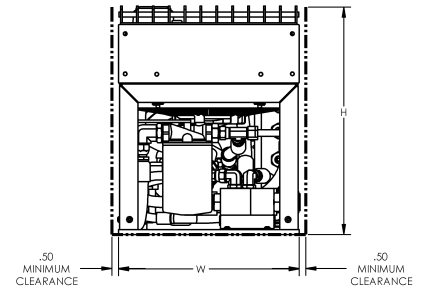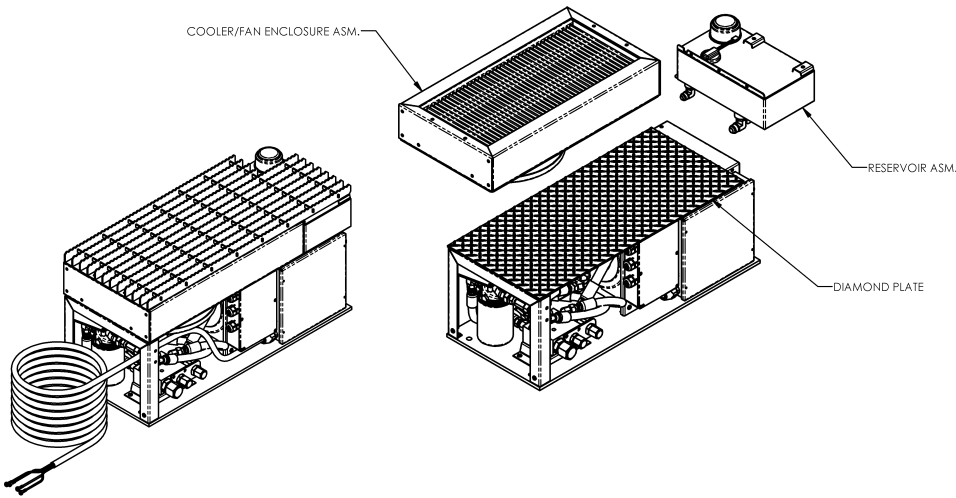

System Specifications

Model number: Part number: AC amps: Continuous watts: Peak watts: Tray weight: AC volts: Frequency: Phase: Generator speed: Frame size: Hydraulic pump type: Fluid:	HR-6 2600006 52/26 6200 7500 213 lb. 120/240 VAC 60 Hertz Single 3600 RPM 32"L x 13.5"W x 17"H 45cc axial piston w/ pressure comp. Dexron III	HR-8 2600008 67/34 8000 9000 230 lb. 120/240 VAC 60 Hertz Single 3600 RPM 32"L x 13.5"W x 17"H 45cc axial piston w/ pressure comp. Dexron III	HR-10 2600010 84/42 10000 12000 247 lb. 120/240 VAC 60 Hertz Single 3600 RPM 32"L x 13.5"W x 17"H 45cc axial piston w/ pressure comp. Dexron III	HR-110 2600110 84/42 10000 12000 247 lb. 120/240 VAC 60 Hertz Single 3600 RPM 32"L x 13.5"W x 17"H 60cc axial piston w/ pressure comp. Dexron III
Model number: Part number: AC amps: Continuous watts: Peak watts: Tray weight: AC volts: Frequency: Phase: Generator speed: Frame size: Hydraulic pump type: Fluid:	HR-15 2600015 125/63 15000 16500 488 lb. 120/240 VAC 60 Hertz Single 1800 RPM 34.5"L x 19"W x 22"H 80 cc axial piston w/ pressure comp. Dexron III	HR-20 2600020 167/83 20000 22000 631 lb. 120/240 VAC 60 Hertz Single 1800 RPM 40"L x 19"W x 22"H 80cc axial piston w/ pressure comp. Dexron III	HR-25 2600025 210/105 25000 27000 650 lb. 120/240 VAC 60 Hertz Single 1800 RPM 40"L x 19"W x 22"H 80cc axial piston w/ pressure comp. Dexron III	HR-30 2600030 250/125 30000 32000 650 lb. 120/240 VAC 60 Hertz Single 1800 RPM 40"L x 19"W x 22"H 80cc axial piston w/ pressure comp. Dexron III